

SYS

SYS (CHG_LANG) F1

All models	○
------------	---

Function: Language change

This macro command is used to switch the language displayed on MONITOUCH to the language specified in [F1].

Available device memory

	Internal device memory	PLC 1 - 8 device memory	Memory card	Constant
F1	◎			

○ : Setting enabled (indirect designation disabled)

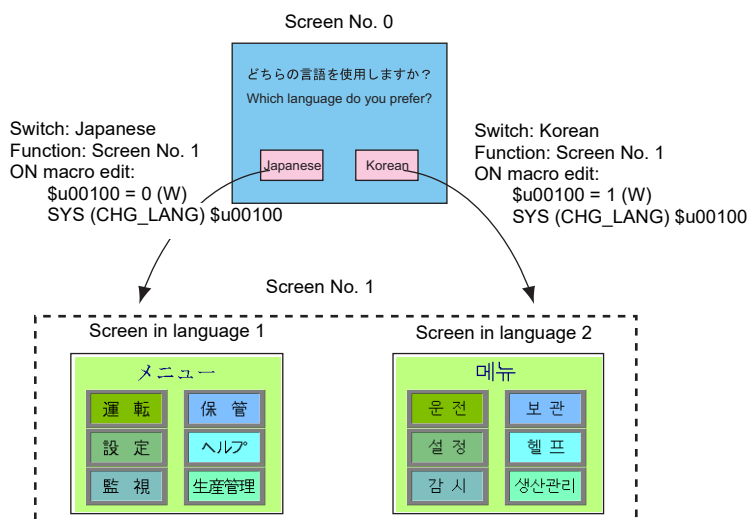
◎ : Setting enabled (indirect designation enabled)

Setting range

	Value
F0	CHG_LANG
F1	0: Language 1 1: Language 2 2: Language 3 : 29: Language 30 30: Language 31 31: Language 32

Example

In the example below, the ON macros for the screen change switches are used to switch between two languages.

**Supplemental remarks**

- When the screen is switched, the language also switches.
To change the language on the same screen, use the "SYS(RESET_SCRN)" command (page 4-315).
- At power-on, the language as displayed before power-off takes effect.